


iX6E/iX6P

Wide Industrial Barcode Printer



Model	iX6E	iX6P
Printing Method	Thermal transfer	Thermal transfer
Resolution /Max. Printing Speed	203 dpi / 7 ips Optional 300 dpi / 5ips	203 dpi / 12 ips Optional 300 dpi / 10 ips
Max. Printing Length	3121mm (203 dpi) 1387mm (300 dpi)	3121 mm (203 dpi) 1387mm (300 dpi)
Max. Printing Width	168 mm	168 mm
Protocol	DPL, ZPL-II	DPL, ZPL-II
Media Type	Continuous Paper, Gap, Black mark Sensor, Punched Hole Label, ECO Thermal Labels, Coated Semi-gloss Art Label, PP/PVC/PET/BOPP Film Label, Synthetic Paper Label, Vinyl, Textile ribbon	Continuous Paper, Gap, Black mark Sensor, Punched Hole Label, ECO Thermal Labels, Coated Semi-gloss Art Label, PP/PVC/PET/BOPP Film Label, Synthetic Paper Label, Vinyl, Textile ribbon
Media Core Diameter	3"(ID.); Max. 8"(OD.)	3"(ID.); Max. 8"(OD.)
Media Thickness	80 μm ~ 254 μm	80 μm ~ 254 μm
Media Width	50.8 mm ~ 175 mm	50.8 mm ~ 175 mm
Ribbon Type	Wax, Wax/Resin, Resin	Wax, Wax/Resin, Resin
Ribbon Core Diameter	1-inch	1-inch
Ribbon Width	58 mm ~ 172 mm	58 mm ~ 172 mm
Length	600m	600m
Sensor	Paper out detect, Ribbon out detect, Print head open detect, Print head temperature detect Power Temp Detection, Motor Temp Detection	Paper out detect, Ribbon out detect, Print head open detect, Print head temperature detect Power Temp Detection, Motor Temp Detection
Standard Interfaces	USB Type B ×1, USB HOST ×3, RJ45 ×1, RS232(9-pin) ×1	USB Type B ×1, USB HOST ×3, RJ45 ×1, RS232(9-pin) ×1
Optional Interfaces	36-pin Parallel Port, D-Sub(15-pin), Wi-Fi, RFID(UHF)	36-pin Parallel Port, D-Sub(15-pin), Wi-Fi, RFID(UHF)
RAM	512MB	512MB
Flash	256 MB	256 MB
Display	3.5-inch Colour Display	3.5-inch Colour Display
Options & Accessory	Peeler Module , Cutter Module , External Label Roll Holder	Peeler Module , Cutter Module , External Label Roll Holder
Dimension (L×W×H)	460.4 × 322 × 330.5mm	460.4 × 322 × 330.5mm
Weight (kg)	14.5	14.5
Agency Approval	CE, FCC, CCC, BIS, CB, UL, RoHS, WEEE	CE, FCC, CCC, BIS, CB, UL, RoHS, WEEE

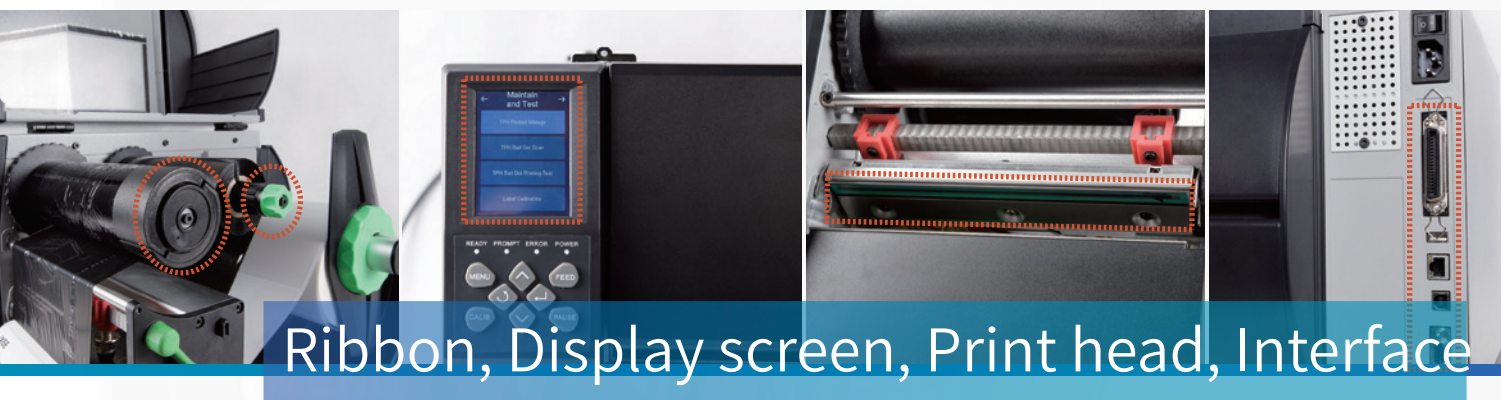

Ribbon, Display screen, Print head, Interface

IDPRT Xiamen Hanin Electronic Technology Co.,Ltd.

ADD: 5F, 10# Building, Gaoqi South 12 Road, Aide Industrial Park, Huli District, Xiamen, P.R China

TEL: +86-(0)592-5932525 FAX: +86-(0)592-5885992

WEB: www.idprt.com EMAIL: info@idprt.com

