

Q8 Series

COMPACT BARCODE LABEL PRINTER



RUGGED
PARTS
DURABLE
MACHINES
EASE-OF-USE
PRINTING

Open body design




Fixed print module
structure



National patented
“Convective Heat
Transfer”



One-piece chassis
enhanced in every
side



SMALL FOOTPRINT WITHOUT COMPROMISING EASE-OF-USE AND DURABILITY

The compact, cozy design makes the Q8 printer the best choice for those space limited applications. The unique mechanism guarantees highly reliable performance with reduced noise. The open structure design enables Q8 users to easily replace consumables.

BENEFITS

A prime example of compact structure design, Q8 owns the most extraordinary stability, and brings you the quietest printing experience.

Cover opened from the side, like an angel's wing. The compact model is simply designed and cute in its appearance.

The operational zone is completely opened, which allows extra space, and makes operations easier and faster.

National patented “Convective Heat Transfer” technology, effectively cools down the working temperature of the printer, especially when printing continuously.

One-piece chassis, strengthened in every side. High quality and reliable.

Q8 has multiple mounting positions for the media sensor, which can be adjusted according to different sizes of media.

3 buttons + 3 indicators, each is responsible for a specific function/status, easy to understand and use.

SPECIFICATIONS

Model	Q8/200	Q8/300
Printing Method	Thermal Ttransfer	
Printing Resolution	203 dpi	300 dpi
Max Printing Speed	4 ips (101.6 mm/s)	3 ips (76.2 mm/s)
Max Printing Width	4.25" (108 mm)	4.17" (106 mm)
Max Printing Length	157" (4000 mm)	79" (2000 mm)
HEAT™ Level	II	
Memory	8 MB FLASH ROM, 16 MB SDRAM	
Media	Roll-feed, die-cut, continuous, tags, tickets in plain paper or thermal paper Width: 4.72" (120 mm) max., 0.98" (25 mm) min. Supply roll: OD 4.49" (114 mm) max., ID 1" (25.4 mm) min. Thickness: 0.003" ~ 0.006" (0.08 ~ 0.15 mm), including liner	
Ribbon	Wax, Wax/Resin, Resin Ribbon roll: OD: max. 1.5" (38 mm), ID: 0.5" (12.7 mm) Max width: 4.3" (110 mm); Max length: 360' (110 M)	
Media Sensor	Reflective (multiple mounting positions)	
Fonts	Five built-in ASCII fonts, Downloadable TrueType fonts	
Bar Code Types	1D Barcode: Code 39, Code 93, Code 128/subset A,B,C, Codabar, Interleave 2 of 5, UPC A/E 2 and 5 add-on, EAN-13/8/128, UCC-128, etc. 2D Barcode: MaxiCode, PDF417, Data matrix, QR Code, etc.	
Interfaces	RS-232 Serial, USB DEVICE 2.0	
Power Rating	24 VDC Power adapter	
Weight	2.1 kgs	
Dimensions	W 8.6" (219 mm) x D 10.0" (255 mm) x H 5.9" (150 mm)	
Operating Environment	Temperature: 32°F ~ +104°F (0°C ~ 40°C), Relative humidity: 5% ~ 85% non condensing	
Storage Environment	Temperature: -40°F ~ +140°F (-40°C ~ 60°C), Relative humidity: 5% ~ 85% non condensing	
Optional Items	Guillotine Cutter, Media Guide Adaptor	

* HEAT™, Heating Equilibrium Adaptive Tuning, newly developed by POSTEK, is a cutting edge technology in heating control of thermal print-heads. With HEAT™, the POSTEK printers can significantly improve their performance in the aspects of printout clarity and print speed. The HEAT™ level represents the fineness of the heating uniformity with level I being the finest.

* All specifications are subject to change without notice.


APPLICATIONS

Healthcare


Retail



Libraries

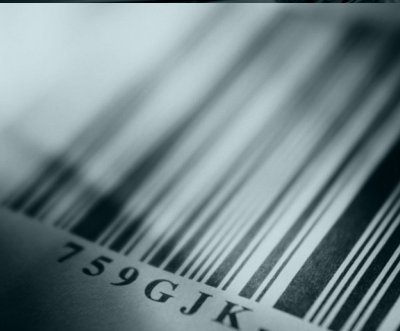...



SAMPLES

XXXXX HOSPITAL			
	Reg. #	2000002049	
	Item:	Blood (4ml) yellow tube	
Name	George Gao	Section	Medical Tech. Dept.
Gender	Female	Bed No.:	Bed 11A, Critical Care
Age	64	Date:	02/26/14
ID	65929651	Type	A +

	Postek Electronics Co., Ltd.
	V.Code: 01.01.099
	P.NO: F.FSMD1100085-G00
	CVT.Des: FSMD110
	D.C: 20120220
	LOT.No: 1BNW
	MOQ: 2000
V.Des: FSMD110	
	

POSTEK

POSTEK ELECTRONICS CO., LTD.

Wisdom Plaza, Block B, Tower 2, 18th Floor
Qiaoxiang Road, Nanshan District, Shen Zhen,
Guang Dong, China

T +86-755-83240988

F +86-755-83202898

WWW.POSTEKTECHNOLOGIES.COM